


Barrington Packaging Systems Group


BPS-FFT-XF Tuck and Fold Wrapper



Packaging Sequence

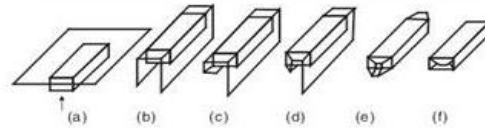

Packaging Configurations

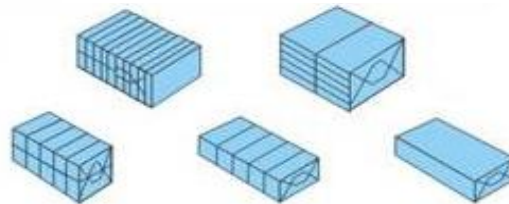

FEATURES AND BENEFITS

- All steel frame - low noise and vibration.
- Stainless Steel for all contact parts.
- Registered wrap.
- Adjustable speed with inverter.
- No product-No film.

Film

Cellophane, PVC, OPP, Paper/PE, AL/PE
 Thickness: 20-60 mic
 Photomark: 5x5mm

MACHINE SPECIFICATIONS

Product Sizes	
Square/Rectangle	L: 50-300mm; W:35-130MM;H:10-80mm L: 1.9-11.8"; W: 1.2-5.1"; H: 0.4-3.2"
Oval	Circ. 90-440mm; L: 50-300 Circ: 3.5-17.3"; L: 1.9-11.8"
Round	Diameter: 40-70mm Diameter: 1.6 - 2.7"
Machine Footprint	L: 4850mm W:1000mm H: 1650mm L: 191" W: 39.4" H: 76"
Power	220V-3 Phase - 50/60Hz - 1.5Kw
Air Consumption	4 - 6KG/Cubic Cm, 100L per hour



*The **free** Barrington Warranty covers all parts, all labor, plus preventive maintenance for two full years.*