


Barrington Packaging Systems Group

Integrating Packaging Equipment, Materials, Production Services and Marketing Support

WRAPPERS

Inverted (Bottom Film) Flow Wrappers

- Bottom film wrapper for irregularly shaped products.
- Dual frequency conversion control, allows bag to be set and cut in one step, saving film.
- HMI panel for ease in setting parameters.
- Self-diagnosis feature with error message display.
- High sensitivity photocell with digital input of cutting and sealing position for extra accuracy.
- Separate PID temperature control, allowing use of a wide range of packaging materials.
- Positioning stop feature so film will not stick to jaws when machine stops.
- Simple drive system for easy maintenance and reliability.
- Software controlled for easy adjustment and upgrading.

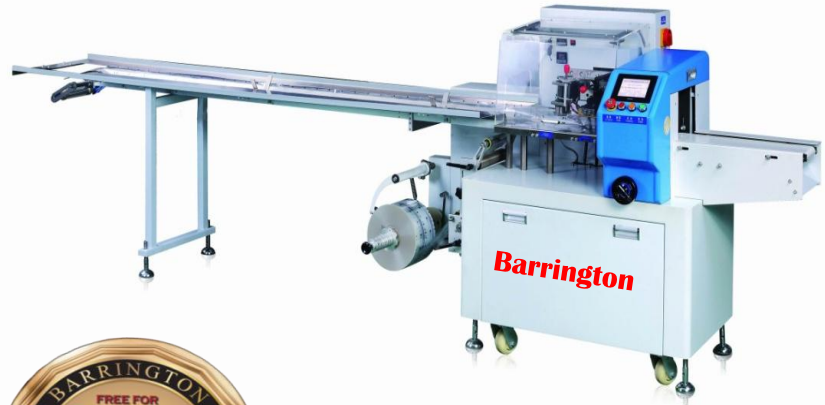

	Electromechanical				Servo			
	BPS-220X		BPS-320X		BPS-220XS		BPS-320XS	
Maximum Film Width (mm)	220		320		220		320	
Maximum Film Width (in.)	8.66		12.60		8.66		12.60	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
Package Length (mm)	65	170	80	210	50	6000	60	6000
Package Length (in)	2.56	6.69	3.15	8.27	1.97	236.22	2.36	236.22
Package Width (mm)	30	100	35	150	30	100	35	150
Package Width (in)	1.18	3.94	1.38	5.91	1.18	3.94	1.38	5.91
Package Height (mm)	5	35	5	55	5	35	5	55
Package Height (in)	0.20	1.38	0.20	2.17	0.20	1.38	0.20	2.17
Max. Combined Width and Height - MM	103.5		153.5		103.5		153.5	
Max. Combined Width and Height - (in)	4.07		6.04		4.07		6.04	
Max. Packing Speed/Minute	200		230		200		230	

