
Barrington Packaging Systems Group

Integrating Packaging Equipment & Materials

BPS Horizontal Ribbon Blender

Stainless Steel Cylinder and Frame, Electromagnetic Valve, Circuit Breaker Emergency Switch, Assist Contactor, Heat Relay, Timer Relay and Variable Turning Rotation Speeds Add-On



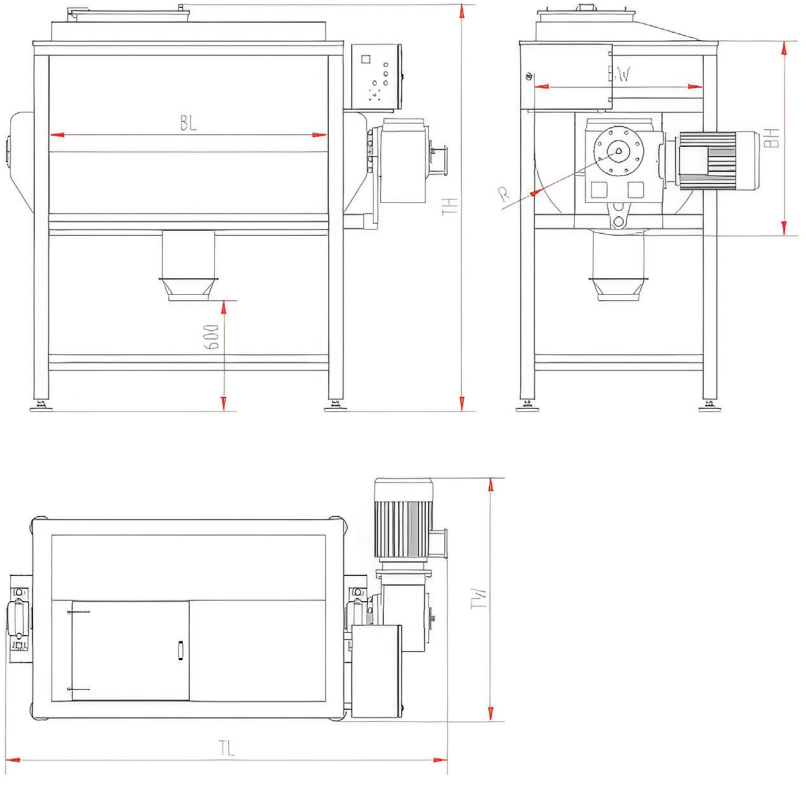

Model	BH-200	BH-300	BH-500	BH-1000	BH-1500	BH-2000
Effective Volume	200L (52.8 gal)	300L (79.3 gal)	500L (132.1 gal)	1000L (264.2 gal)	1500L (396.3 gal)	2000L (528.3 gal)
Total Volume	284L (75 gal)	404L (106.7 gal)	692L (182.8 gal)	1286L (339.7 gal)	1835L (484.8 gal)	2475L (653.8 gal)
Turning Speed	46rpm is the industry default speed.		**Barrington Packaging offers a Variable Speeds Turning Rotation add-on option**			
Total Weight	250kg (551.2 lbs)	350kg (771.6 lbs)	500kg (1102.3 lbs)	700kg (1543.2 lbs)	1000kg (2204.6 lbs)	1300kg (2866 lbs)
Total Power	4kw (5.4 hp)	5.5kw (7.4 hp)	7.5kw (10.1 hp)	11kw (14.8 hp)	15kw (20.1 hp)	22kw (29.5 hp)
Length (TL)	1370mm (53.9")	1550mm (61")	1773mm (69.8")	2394mm (94.3")	2715mm (106.9")	3080mm (121.3")
Width (TW)	834mm (32.8")	970mm (38.2")	1100mm (43.3")	1320mm (52")	1397mm (55")	1625mm (64")
Height (TH)	1647mm (64.8")	1655mm (65.2")	1855mm (73")	2187mm (86.1")	2313mm (91.1")	2453mm (96.6")
Length (BL)	888mm (35")	1044mm (41.1")	1219mm (48")	1500mm (59.1")	1800mm (70.9")	2000mm (78.7")
Width (BW)	554mm (21.8")	614mm (24.2")	754mm (29.7")	900mm (35.4")	970mm (38.2")	1068mm (42")
Height (BH)	637mm (25.1")	697mm (27.4")	835mm (32.9")	1050mm (41.3")	1155mm (45.5")	1274mm (50.2")
Dump Gate (R)	277mm (10.9")	307mm (12.1")	377mm (14.8")	450mm (17.7")	485mm (19.1")	534mm (21")
Power Supply	3P AC208-415V 50/60Hz					

Barrington Packaging Systems Group

Barrington Packaging Systems Group, Inc.

Local: (847) 382-8063 Toll-Free: (888) 814-7999 x1 Fax: (847) 382-8064

https://bpsgUSA.com sales@bpsgUSA.com

HQ: 835 Barrington Point, Barrington, IL 60010

Showroom: 526 N. York Road Bensenville, IL 60106

BARRINGTON WARRANTY 2 YEARS PARTS & LABOR PACKAGING SYSTEMS GROUP